




## 2X Series LED Zone Indicator Boards

2X-ZI-20, 2X-ZI-40, 2X-ZI-24-S

### Overview

The 2X Series life safety control systems that bring the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications are supported by a complete line of modules and related equipment that enhance performance and extend system capabilities. Option boards are easy to install and set up. They simply plug directly on the front of the fire panel main board on the easy to remove chassis. After installation, the pluggable terminals remain easily accessible for quick connection of field wiring. The housing provides ample space and fixing solutions for wire routing, keeping wiring neat and easy to service at all times.

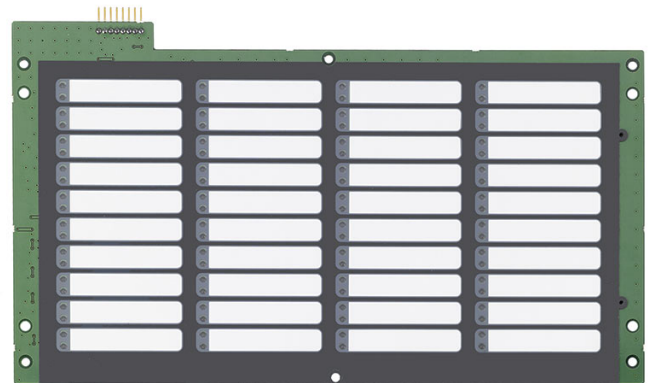

### 2X-ZI-20 LED indicator - 20 zones

This LED zone indicator board will give you LED indication with ample space for zone text for 20 zones. It can be plugged directly in the easy to remove front door of the fire panel or fire panel repeater. No additional cabling needs to be done. The board will give you 1 red alarm LED and 1 yellow fault LED per zone.

### 2X-ZI-40 LED indicator - 40 zones

This LED zone indicator board will give you LED indication with ample space for zone text for 40 zones. It can be plugged directly in the easy to remove front door of the fire panel or fire panel repeater. No additional cabling needs to be done. The board will give you 1 red alarm LED and 1 yellow fault LED per zone.

### 2X-ZI-24 LED indicator - 24 zones

This LED zone indicator board will give you LED indication with space for a zone number for 24 zones. It can be plugged directly in the easy to remove front door of the fire panel or fire panel repeater. No additional cabling needs to be done. The board will give you 1 red alarm LED and 1 yellow fault LED per zone.

### Standard Features

- 2X-ZI-20
  - » LED indications for 20 zones
  - » 1 LED for fire and 1 LED for fault per zone
  - » Ample space for zone text
  - » For panels and repeaters
- 2X-ZI-40
  - » LED indications for 40 zones
  - » 1 LED for fire and 1 LED for fault per zone
  - » Ample space for zone text
  - » For panels and repeaters
- 2X-ZI-24-S
  - » LED indications for 24 zones
  - » 1 LED for fire and 1 LED for fault per zone
  - » Ample space for a zone number
  - » For panels and repeaters

# 2X Series LED Zone Indicator Boards

2X-ZI-20, 2X-ZI-40, 2X-ZI-24-S

## Specifications

### 2X-ZI-20

Zones	20
Red LED's	20
Yellow LED's	20
Text space	9 x 47 mm
Weight	0.11 kg

### 2X-ZI-40

Zones	40
Red LED's	40
Yellow LED's	40
Text space	9 x 47 mm
Weight	0.12 kg

### 2X-ZI-24-S

Zones	24
Red LED's	24
Yellow LED's	24
Text space	9 x 13 mm
Weight	0.08 kg

### Environmental conditions

Storage temperature	-10°C to +50 °C
Operating temperature	-8°C to +42 °C
Relative humidity	max. 95 % (non-condensing)

## Ordering Information

Part No.	Description
2X-ZI-24-S	Addressable Fire Panel Component - LED indicator - 24 zone
2X-ZI-40	
2X-ZI-20	

