
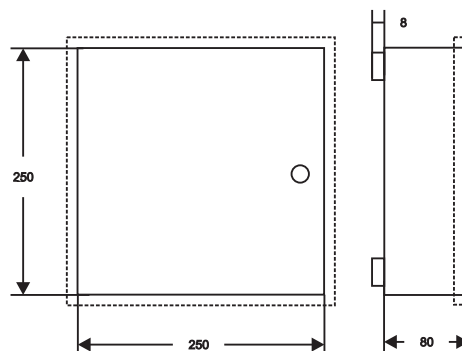


CODE: AWO000EI v1.1
NAME: 7/EI20/DSPR

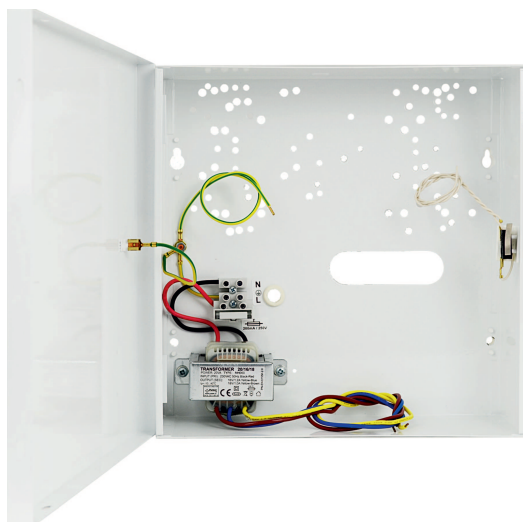

DESTINATION

DSC: PC 1616, 1832, PC1404

MODULES: 2x (4108, 5108, 5208, 5100, 4116)
 4204, 4216, 4580, 5400, 5204, 5580, 5200

PARADOX: 728ULT, E55, E65, SP4000, SP5500, SP6000

MODULES: ZX8, APR3- HUB2, ZX8SP, APR3-ADM2, PGM4

RISCO: PRO24

MODULES: E04, EZ8, EZ16

SATEL: CA4V1, CA5, CA6, VERSA5,10, INTEGRA24

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR)

PYRONIX: MATRIX 424, 6

CROW: RUNNER 4,8

SUMMIT: PENTA

ROEL: SIGMA6,12, CERBER

EBS: PX 202A

TECHNICAL DATA

Dimensions:	internal: W=250, H=250, D=80 external: W1=255, H1=255, D1=88mm [mm, +/-2]
Weight net/gross:	1,90kg/ 2,05kg [+/-0,1kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Transformer:	EI 20VA/16V/18V
Primary winding	
fuse transformer:	T 200mA
Power supply	230V/AC (-15%/+10%), 50Hz, 120mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=1,2A or I2=1,0A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Certification, declaration:	CE, RoHS