


**CODE:** AWO000PU v.1.8  
**NAME:** 7/20/DSPR/PUSTA

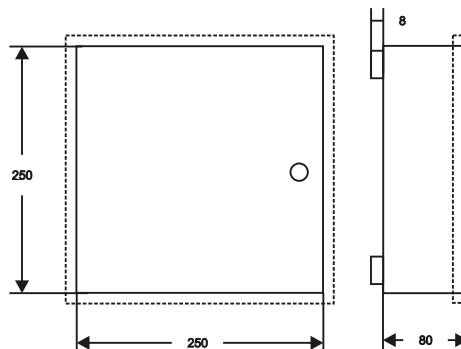

## DESTINATION

**DSC:** PC 1404, 1616, 1832, 1864

**MODULES:** 2x ( 4108, 5108, 5208, 5100, 4116)

4204, 4216, 4580, 5400, 5204, 5580, 5200

**PARADOX:** 728ULT, E55, E65, SP4000, 5500, SP6000

**MODULES:** ZX8, APR3- HUB2, ZX8SP, APR3- ADM2, PGM4

**RISCO:** PRO24

**MODULES:** E04, EZ8, EZ16

**SATEL:** CA4V1, CA5, CA6, VERSA5,10, INTEGRA24

**MODULES:** CA64 ( PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR)

**PYRONIX:** MATRIX 424, 6

**CROW:** RUNNER 4,8

**TELMOR:** TCA-824

**SUMMIT:** PENTA

**ROEL:** SIGMA6,12, CERBER

**EBS:** PX202A

## TECHNICAL DATA

**Dimensions:** internal: W=250, H=250, D=80 external: W1=255, H1=255, D1=88mm [mm, +/-2]

**Weight net/gross:** 1,35kg / 1,50kg [ +/-0,1kg]

**Battery space:** 7Ah/12V Sealed Lead Acid (SLA)

**Transformer:** without transformer - can be mounted in the casing: TRP20, TRP40, TRZ20, TRZ40, EI20, EI40.

**Material description:** sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Tamper protection:** 1 x microswitch: opening, 0,5A@50V/DC max. NC

**Closing:** screwed x 4

**Notes:** optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal

**Certification, declaration:** RoHS