


CODE: AWO009 v1.0
NAME: 7/TRP40/DSPR/S

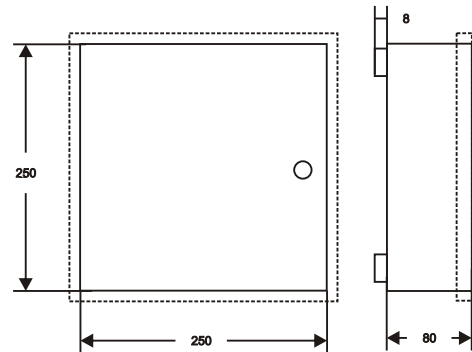

DESTINATION

DSC: PC 1616, 1832, 1864

MODULES: 2x (4108, 5108, 5208, 5100, 4116)
 4204, 4216, 4580, 5400, 5204, 5580, 5200

PARADOX: 728ULT, E55, E65, SP4000, SP5500, SP6000, SP7000, EVO48, EVO192

MODULES: ZX8, APR3- HUB2, ZX8SP, APR3- ADM2, PGM4

RISCO: PRO24

MODULES: E04, EZ8, EZ16

SATEL: CA4V1, CA5, CA6, CA10, VERSA5, 10, 15, INTEGRA24, 32

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA)

PYRONIX: MATRIX 424, 6

CROW: RUNNER 4,8

TELMOR: TCA- 824

SUMMIT: PENTA

ROEL: SIGMA6,12, CERBER

EBS: PX202A

TECHNICAL DATA

Dimensions: internal: W=250, H=250, D=80 external: W1=255, H1=255, D1=88mm [mm, +/-2]

Weight net/gross: 2,40kg/ 2,55kg [+/-0,1kg]

Battery space: 7Ah/12V Sealed Lead Acid (SLA)

Transformer: TRP 40VA/16V/18V in the case of PC/ABC in class UL94-V0, IP20

Power supply: 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

Power supply output: U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)

Operating environment: class II , -10°C+ 40°C

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5A@50V/DC max. NC

Closing: screwed x 4

Notes: optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal

Certification, declaration: CE, RoHS