


**CODE:** AWO150 v1.7  
**NAME:** 7/TRP40/DSPR

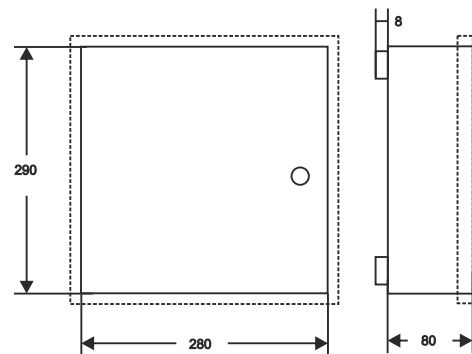

## DESTINATION

**DSC:** (PC 1404, 1616, 1832, 1864,4020)+ 5108 (4108, 5208, 5100, 4116)

**MODULES:** 3x (4108, 5108, 5208, 5100, 4116)  
 1x (4204, 4216, 4580, 5400, 5204, 5580, 5200)

**PARADOX:** (728ULT, E55, E65, SP5500, SP6000, SP7000, EVO48, EVO192) + ZX8 (ZX4)

**MODULES:** 2x (ZX8, ZX4, APR3- HUB2)  
 1x (APR3-ADM2)

**RISCO:** PRO24 + EZ16 (EZ04, EZ08)  
 PRO116, 128, 140

**MODULES:** 2x EZ16 (EZ04, EZ08)

**SATEL:** CA4V1, CA5, CA6  
 (VERSA5,10, 15, CA10)+ CA10E (CA64E, SM, MST1)  
 (INTEGRA24, 32) + CA64E, (SM)

**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA) + CA64E (SM)

**PYRONIX:** MATRIX 424, 6, 816, 832, 832+

**CROW:** RUNNER 4,8

**TELMOR:** TCA- 824

**ROEL:** SIGMA6,12, CERBER

**ROGER:** PR402, CPR 32- SE

**EBS:** PX 202A

**PULSAR:** MS1512, MSR 1512, MSRK 1512  
 MS2512, MSR2512, MSRK2512

## TECHNICAL DATA

**Dimensions:** **internal:** W=280, H=290, D=80 **external:** W1=285, H1=295, D1=88mm [mm, +/-2]

**Weight net/gross:** 2,70kg / 2,85kg [+/-0,1kg]

**Battery space:** 7Ah/12V Sealed Lead Acid (SLA)

**Transformer:** TRP 40VA/16V/18V in the case of PC/ABC in class UL94-V0, IP20

**Power supply** 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

**Power supply output:** U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)

**Operating environment:** class II , -10°C+ 40°C

**Material description:** sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Tamper protection:** 1 x microswitch: opening, 0,5A@50V/DC max. NC

**Closing:** screwed x 4

**Notes:** optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal

**Certification, declaration:** CE, RoHS