


CODE: **AWO200EI v1.0**  
 NAME: **17/EI40/DSPR/L**

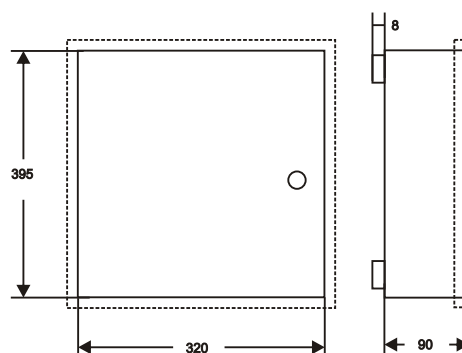

### DESTINATION

**DSC:** (PC 1616, 1832, 1864,4020) + 3x5108 (4108, 5208, 5100, 4116)

**MODULES:** ( PC 5204, 5400,5200, 5580, 4216,4204) + 3x ( 5108, 4108, 5100, 4116, 5208)

**PARADOX:** ( E55, E65, 728ULT,EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + 2 x Z X 8 ( Z X 4, APR3- ADM2, APR3-HUB2, PGM4)

**RISCO:** PRO24, 116, 128, 140+ RP296EPS+ EZ16 ( E04, EZ8)

**SATEL:** CA4V1, CA5, CA6

( VERSA 5, 10, 15, CA10) + 2 x CA10E ( CA64E, SM, MST1)

( INTEGRA24, 32) + 2 x CA64E ( SM)

**MODULES:** CA64 ( PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA) + 2 x CA64E ( SM)

**PYRONIX:** MATRIX 424, 6, 816, 832, 832+

**TEXECOM:** PREMIER 412, 816, 832, 48, 88, 168, 640

**TELMOR:** TCA- 824 + TEX800+ TMT1

**ROGER:** PR402, CPR 32-SE

**EBS:** PX202A

**PULSAR:** MS 1512, MSR 1512, MSRK 1512  
 MS 2512, MSR 2512, MSRK 2512

### TECHNICAL DATA

<b>Dimensions:</b>	<b>internal:</b> W=320, H=395, D=90 <b>external:</b> W1=325, H1=400, D1=98mm [mm, +/-2]
<b>Weight net/gross:</b>	3,45kg / 3,70kg [+/-0,1kg]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	EI 40VA/16V/18V
<b>Primary winding</b>	
<b>fuse transformer:</b>	T315mA
<b>Power supply</b>	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
<b>Power supply output:</b>	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)
<b>Operating environment:</b>	class II , -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5A@50V/DC max. NC
<b>Closing:</b>	screwed x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
<b>Certification, declaration:</b>	CE, RoHS