

PSC series power supply



Switch mode power supply 12VDC, IP67

CODE:

PSC12015 v1.0/V

EN

TYPE:

PSC 12V/1,5A/62MM switch mode power supply

Features of the power supply unit:

- power output 1,5A/12VDC*
- universal AC input voltage range 90÷264V
- high efficiency 81%
- standby power <0,3W
- efficiency level: V
- IP 67 case
- protections:
 - SCP short-circuit protection
 - overvoltage protection (AC input)
 - overload (OLP)
- warranty – 2 year from the production date




DESCRIPTION

Stabilized DC power supply is intended for supply CCTV cameras that require stabilised voltage of **12V DC**. Power supply can be assembled in installation box or fitted with 3mm screws. The unit is protected against short-circuit and overload.

TECHNICAL DATA

Supply voltage	90 ÷ 264V AC 50÷60Hz
Current consumption	0,16A@230V AC max.
Supply power	18W max.
Efficiency	81%
Output voltage	12VDC
Output current $t_{AMB} < 30^{\circ}\text{C}$	1,5A - refer to graph 1.
Output current $t_{AMB} = 40^{\circ}\text{C}$	1A - refer to graph 1.
Ripple voltage	100mV p-p max.
Short-circuit protection SCP	electronic, automatic recovery
Overload protection OLP	105-150% of power supply, automatic recovery
Overtoltage protection	varistor (AC input)
IP protection class	IP67
Operation conditions	temperature $0^{\circ}\text{C} \div 40^{\circ}\text{C}$ relative humidity 20%...90%
Dimensions (LxWxH)	58 x 58 x 28 [mm]
Net/gross weight	0,16kg / 0,19kg
Protection class PN-EN 60950-1:2007	II (second)
Lenght of DC cable	0,5 m + plug DC5,5/2,1 female
Lenght of AC cable	0,3 m
Storage temperature	-20°C...+60°C

* In order to extend the life of the power supply, the load current of 1A is recommended.

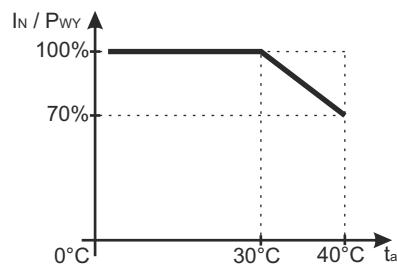

Graph 1.
Relation between output current and ambient
temperature (instantaneous load).


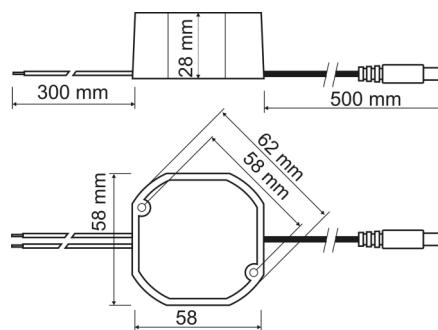


Fig. 1 Dimension of power supply.

ACCESORIES

ACCESORIES :
[1] adapter CABLE - PLUG DC 5,5/2,1 - code ML109

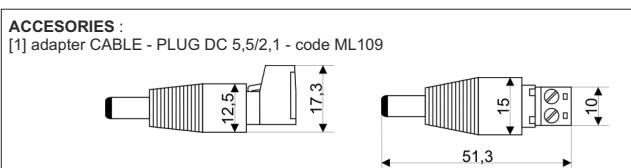

For power supplies are available
accessories - fuse blocks and cable adapter.
For details –visit www.pulsar.pl.

* Refer to graph 1