


CODE: **AWO200PU v.1.8**
 NAME: **17/40/DSPR/L/PUSTA**

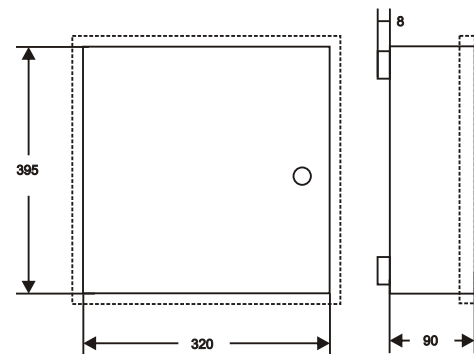

DESTINATION

DSC: (PC 1616, 1832, 1864,4020) + 3x 5108 (4108, 5208, 5100, 4116)

MODULES: (PC 5204, 5400,5200, 5580, 4216,4204) + 3x (5108, 4108, 5100, 4116, 5208)

PARADOX: (E55, E65, 728ULT,EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + 2 x Z X 8 (Z X 4,APR3- ADM2, APR3-HUB2, PGM4)

RISCO: PRO24, 116, 128, 140+ RP296EPS+ EZ16 (E04, EZ8)

SATEL: CA4V1, CA5, CA6

(VERSA5, 10, 15, CA10) + 2 x CA10E (CA64E, SM, MST1)

(INTEGRA24, 32) + 2 x CA64E (SM)

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC,O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA) + 2 x CA64E (SM)

PYRONIX: MATRIX 424, 6, 816, 832, 832+

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640

TELMOR: TCA- 824 + TEX800+ TMT1

ROGER: PR402, CPR 32-SE

EBS: PX 202A

PULSAR: MS 1512, MSR 1512, MSRK 1512

MS 2512, MSR 2512, MSRK 2512

TECHNICAL DATA

| | |
|------------------------------------|--|
| Dimensions: | internal: W=320, H=395, D=90 external: W1=325, H1=400, D1=98mm [mm, +/-2] |
| Weight net/gross: | 2,40kg / 2,60kg [+/-0,1kg] |
| Battery space: | 17Ah/12V Sealed Lead Acid (SLA) |
| Transformer: | without transformer- can be mounted in the casing: TRP20, TRP40, TRZ20, TRZ40, TRZ50, TRZ80, TOR50, TOR80, EI20, EI40. |
| Tamper protection: | 1 x microswitch: opening, 0,5A@50V/DC max. NC |
| Material description: | sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003 |
| Destination: | indoor |
| Closing: | screwed x 4 |
| Notes: | optional: lockable,distance from wall (mounting surface)- 8mm, easy door removal |
| Certification, declaration: | RoHS |