


CODE: **AWO220EI v1.1**
 NAME: **17/EI40/DSPR/S**

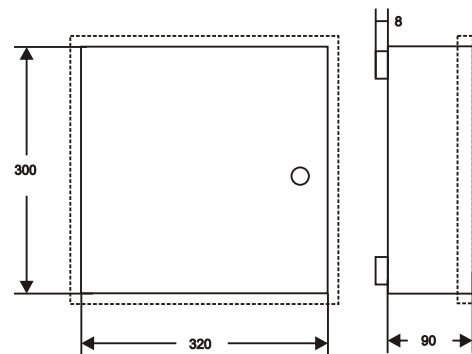

DESTINATION

DSC: (PC 1404, 1616, 1832, 1864,4020) + 5108 (4108, 5208, 5100, 4116)

MODULES: (PC 5204, 5400, 5580, 5200, 4216,4204) + (5108, 5208, 4108, 5100, 4116)

PARADOX: (E55, E65, 728ULT, EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + Z X 8 (Z X 4, HUB2, PGM4)

RISCO: PRO24 z 17 Ah

PRO116, 128, 140 z 7Ah

SATEL: CA4V1, CA5, CA6

(VERSA5, 10, 15, CA10) + CA10E (CA64E, SM, MST1)

(INTEGRA24, 32) + CA64E (SM)

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM- 16, SR, PTSA) + CA64E (SM)

PYRONIX: MATRIX 424, 6, 816, 832, 832+

CROW: RUNNER 4,8

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640

TELMOR: TCA- 824 + TEX800

ROGER: PR402, CPR 32-SE

EBS: PX 202A

PULSAR: MS 1512, MSR 1512, MSRK 1512

MS 2512, MSR 2512, MSRK 2512

TECHNICAL DATA

Dimensions: internal: W=320, H=300, D=90 external: W1=325, H1=305, D1=98mm [mm, +/-2]

Weight net/gross: 3,00kg / 3,20kg [+/-0,1kg]

Battery space: 17Ah/12V Sealed Lead Acid (SLA)

Transformer: EI 40VA/16V/18V

Primary winding

fuse transformer: T315mA

Power supply 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

Power supply output: U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)

Operating environment: class II , -10°C+ 40°C

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5A@50V/DC max. NC

Closing: screwed x 4

Notes: optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal

Certification, declaration: CE, RoHS