


CODE: **AWO221 v1.0/l**  
 NAME: **Casing 17/TRP40/DSPR/S/G3**

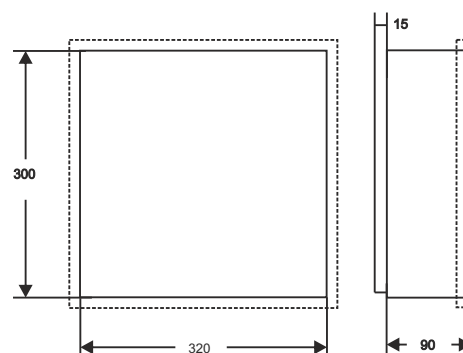

## DESTINATION

**DSC:** (PC 1404, 1616, 1832, 1864,4020) + 5108 (4108, 5208, 5100, 4116)

**MODULES:** (PC 5204, 5400, 5580, 5200, 4216,4204) + (5108, 5208, 4108, 5100, 4116)

**PARADOX:** (E55, E65, 728ULT, EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + Z X 8 (Z X 4, HUB2, PGM4)

**RISCO:** PRO24 z 17 Ah  
 PRO116, 128, 140 z 7Ah

**SATEL:** CA4V1, CA5, CA6  
 (VERSA5, 10, 15, CA10) + CA10E (CA64E, SM, MST1)  
 (INTEGRA24, 32) + CA64E (SM)

**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM-16, SR, PTSA) + CA64E (SM)

**PYRONIX:** MATRIX 424, 6, 816, 832, 832+

**CROW:** RUNNER 4,8

**TEXECOM:** PREMIER 412, 816, 832, 48, 88, 168, 640

**TELMOR:** TCA-824 + TEX800

**ROGER:** PR402, CPR 32-SE

**EBS:** PX 202A

**PULSAR:** MS 1512, MSR 1512, MSRK 1512  
 MS 2512, MSR 2512, MSRK 2512

## TECHNICAL DATA

**Dimensions:** internal: W=320, H=300, D=90 external: W1=325, H1=305, D1=105mm [mm, +/-2]

**Weight net/gross:** 4,17kg / 4,47kg [ +/-0,1kg]

**Battery space:** 17Ah/12V Sealed Lead Acid (SLA)

**Transformer:** TRP 40VA/16V/18V in the case of PC/ABC in class UI 94-V0, IP20

**Power supply:** 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

**Power supply output:** U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)

**Operating environment:** class II, -10°C+ 40°C

**Material description:** sheet steel DC01, thickness: 1.0mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Tamper protection:** 2 x microswitch: opening, 0,5A@50V/DC max. NC  
 NC/NO contacts

**Closing:** screwed x 2

**Notes:** optional: lockable, distance from wall (mounting surface) - 15mm, "C"-shaped doors and the bottom of the casing, no hinges

**Certification, declaration:** CE, RoHS in accordance with the EN50131 standard, Grade 3.