



DF400


UltraLink processor module with 8/8 relay outputs/inputs. DIN-rail mount

Ultralink I/O modules are used to receive and/or transmit alarm information as part of an integrated security system.

Applications include:

- Converting FlexZone sensor alarm collected over the Silver Network to relays or open-collector outputs for input to a 3rd party Security Management System.
- Collecting auxiliary sensor alarms with dry-contact inputs for display with a Management system.

The Ultralink I/O module connects to the Silver Network via a communication card. Up to 8 Ultralink expansion modules can be attached to one UltraLink module (DF432). Configuring the mods of operation of the relay outputs, open-collector outputs and dry-contact inputs is done with the UCM software. The UCM can be connected to the Ultralink modules either by a direct USB connector to the I/O processor or by an IP connection via the Network manager Software.

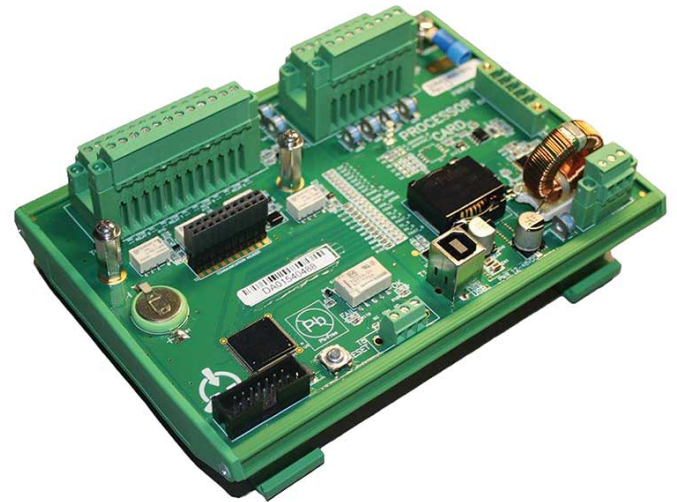

Standard Features

- Hosts one network communication card
- Expansion port for up to 8 Ultralink expansion modules
- USB configuration port
- 8 relay outputs
- 8 dry-contact inputs
- Supplies power to connected modules
- Modular system comprised of processor module, relay module, open-collector output module & dry-contact input module

DF400

UltraLink processor module with 8/8 relay outputs/inputs. DIN-rail mount

Specifications

Operating voltage	12 to 48 VDC
Relay outputs	8
Dry-contact inputs	8
Dimensions	160m W x118m H
Temperature	0 to +55°C
Relative humidity	0 to 95% non condensing

Ordering Information

Part No.	Description
DF400	UltraLink processor module with 8/8 relay outputs/inputs. DIN-rail mount

