


CODE: **AWO301PU** v.1.2
NAME: **24/80/DS/PUSTA**

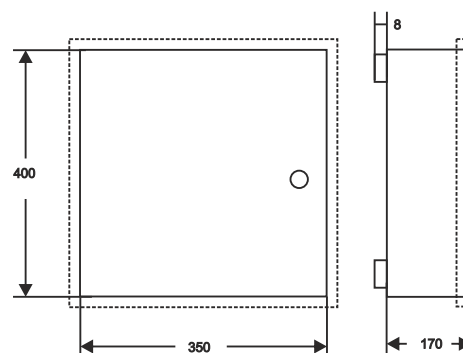

DESTINATION

DSC

- 1) PC1616, 1832, 1864, 4020, 6010, 4x (4108, 5108, 6108, 5100, 4116, 5208) + 3x (5204, 5400, 5200, 5580, 4216, 6216, 6400)

Modules:

- 1) (4204, 6204) + 4x (4108, 5108, 6108, 5100, 4116, 5208) + 3x (5204, 5400, 5200, 5580, 4216, 6216, 6400)

Satel

- 1) CA10, VERSA10,15, INTEGRA 24, 32, 64, 128 + 6x CA64E (SM)
- 2) CA10, VERSA10,15, INTEGRA 24, 32, 64, 128 + 5x CA64 (EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC-KP-PS)
- 3) 6x CA64 (EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC-KP-PS)
- 4) 3x CA64 (PP, OPS-OC, OPS-R, OPS-ROC) + CA64 (EPS, O-OC, O-ROC, O-R, VGM-16, SR, ADR, ACC-KP-PS) + 3x CA64E (SM)

TECHNICAL DATA

Dimensions:	internal: W=350, H=400, D=170 external: W1=355, H1=405, D1=178mm [mm, +/-2]
Weight net/gross:	4,70kg / 4,90kg [+/-0,1kg]
Battery space:	24Ah/12V Sealed Lead Acid (SLA)
Transformer:	without transformer - can be mounted in the casing: TRZ50,TRZ80
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Certification, declaration:	RoHS