


CODE: **AWO360 v1.1**
 NAME: **LCD/B SATEL/W**

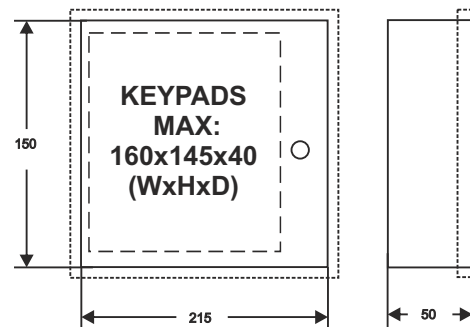

DESTINATION

SATEL

KEYPADS: CA-5 KLCD-L, CA-10 KLCD-L, CA-64 KLCD-L, INTEGRA KLCD (KLCD-R), CA-4V KLED, CA-6 KLED, CA 10 KLED, CA-64 S, CA-64 SZ, SZW-02

PARADOX

KEYPADS: DIGIPLEX DGP-641 LCD, DGP-610 LED, DGP-620 LED, SPECTRA 1686 V (696)

GALAXY KEYPADS: MK-5 (CP-25)

VISONIC KEYPADS: KP-1002LCD, 1001/8LED, 1001/16LED

PYRONIX KEYPADS: MATRIX LCD FP 12610.

CADDX NETWORK

KEYPADS: NX-148E(LCD), NX-1348E (LCD- ikona), NX-108E, NX-116E, NX-124E (LED)

ROKONET KEYPADS: PROSYS LCD, RP 128 KLC

ELKRON KEYPADS: KP100D, KP100, KP200D, KP106

ADEMCO KEYPADS: AD6139

PIMA KEYPADS: RX-400

FBII KEYPADS: OMNIKPLCD

TECHNICAL DATA

Casing dimensions:	internal: W=215, H=150, D=50 external: W1=220, H1=155 [mm, +/-2]
Keypads dimensions:	max: W=160, H=145, D=40 [mm, +/-2]
Weight net/gross:	0,80kg / 0,90kg [+/-0,1kg]
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	lockable (MR 008 - different code)
Notes :	removable back mounting plate (without holes) keypad status preview - inspection window
Certification, declaration:	RoHS