


CODE: AWO515 v1.6/II
NAME: 17/TRZ50/M-F/SATEL

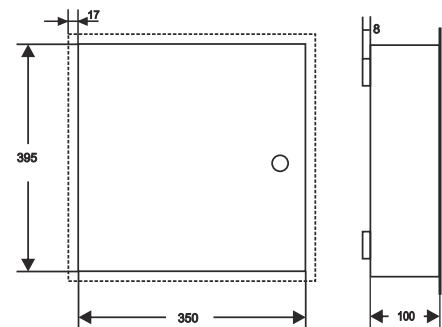

DESTINATION

DSC: 1) PC1616, 1832, 1864, 4020+ 3x 5108(4108, 5208, 5100, 4116)

MODULES: 1) PC5204, 5400, 5200, 5580, 4216, 4204+ 3x 5108 (4108, 5208, 5100, 4116)

PARADOX: E55, 65, 728ULT, SP4000, 5500, 6000, 7000, EVO48, 192 + ZX8 (ZX4, APR3- ADM2, APR3- HUB2, PGM4)

RISCO: 1) PRO24, 116, 128, 140+ RP296EPS

SATEL: 1) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32+ 2xCA64E (CA10E, SM, MST1)
 2) INTEGRA 64/128 + CA64E(CA10E, SM, MST1)

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM16, SR, PTSA)+ 2x CA64E (CA10E, SM, MST1)

PYRONIX: 1) MATRIX 424, 6,816, 832, 832+

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640

TELMOR: 1) TCA824+ TEX800

ROGER: 1) PR402, CPR 32-SE

EBS: 1) PX202A

PULSAR: 1) MS1012, MSR1012, MSRK1012
 2) MS2012, MSR2012, MSRK2012

TECHNICAL DATA

Dimensions:	internal: W=350, H=395, D=100 external: W1=385, H1=430, D1=110mm [mm, +/-2]
Weight net/gross:	5,75kg / 6,20kg [+/-0,1kg]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRZ 50VA16V/18V/20V in the case of PC/ABS in class UL94-V0, IP43
Power supply:	230V/AC (-15%/+10%), 50Hz, 250mA (max.)
Power supply output:	U1=16V or U2=18V or U3=20V/AC (-5%, +15%), I1=3,0A or I2=2,8A or I3=2,5A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	lockable (MR 008 - different code)
Notes:	flush type casing, removable back mounting plate and front frame, easy door removal, additional side mounting plate(s), for Satel's control panels only, distance from wall - 8mm
Declaration, warranty:	CE, warranty – 2 year from the production date