

TVB-2407

TruVision HD-TVI Analog Bullet Camera, PAL, 3MPX, 3.6mm Lens, True D/N, WDR, 20m IR, Dual-Output 960H Monitor or HD-TVI, Coax OSD control, 12VDC, IP66

Overview

The TruVision® HD-TVI Bullet Cameras by Interlogix deliver cost effective surveillance with 3MPX resolution HD-TVI technology over existing coaxial cable. The 3MPX HD-TVI cameras must be used with a 3MPX (or higher) resolution HD-TVI DVR and will not function in TVI mode on a lesser TVI Recorder. The bullet camera model also offers a familiar form factor that features a pre-installed wall mount with cable management and is IP66 rated for outdoor installation. With the ability to see in low-light conditions, the HD-TVI Bullet Cameras provide color images by day and black-andwhite images in night-time applications (in onjunction with IR illumination). Ideal for new or existing projects, the HD-TVI Bullet Cameras are quick and easy to install and can help users stay within budget constraints without compromising security needs.



Details

- 3MPX resolution
- HD-TVI technology for transmitting HD quality video over existing coax cable
- True day/night functionality and infrared illuminators with Smart IR function for capturing images in various lighting scenarios
- IR range of up to 20 m
- IP66 environmental rating
- Wide Dynamic Range (WDR), 120 dB
- 3.6 mm fixed lens
- IP66 environmental rating
- 12 VDC
- The 3MPX HD-TVI output is only compatible with 3MPX capable HD-TVI recorders such as the TVR 15HD

TVB-2407

TruVision HD-TVI Analog Bullet Camera, PAL, 3MPX, 3.6mm Lens, True D/N, WDR, 20m IR, Dual-Output 960H Monitor or HD-TVI, Coax OSD control, 12VDC, IP66

Technical Specifications

Camera

Sensor Size	1/3"
Sensor Scan	Progressive
Sensor Type	CMOS
Max. Resolution	3 MPX
Total Pixels (H x V)	2052 x 1536
Effective Pixels (H x V)	2052 x 1536
Pick-up device:	1/3" Progressive Scan CMOS
Effective pixels (H x V):	2052 x 1536
Resolution:	3 MPX
Sync. system:	Internal
S/N ratio:	More than 52 dB
Electronic shutter:	1/25 to 1/50,000 s
Color sensitivity:	0.01 lux @ f1.2 (AGC On)
B/W sensitivity:	0 Lux with IR on
Video output:	3MPX TVI or 960H Analog
IR distance:	Up to 20 m
Lens type:	Fixed: 3.6 mm
Wide dynamic range:	WDR
Digital noise reduction:	DNR
OSD:	Yes

Lighting performance

Wide dynamic range (WDR)	True WDR
WDR	120 dB
Digital Noise Reduction	3D DNR
Day/Night	True Day/Night
Motorized IR Cut Filter	No
Color Sensitivity	0.01 lux @ f1.2 (AGC On)
B/W Sensitivity	0 lux with IR on
InfraRed (IR)	Yes
IR Sensitivity	0 lux with IR
IR Range	Up to 20 m
IR Wavelength (nm)	850 nm

Lens

Focal length	2.8 mm
Auto-iris	No
Auto-focus	No
Motorized Zoom	No
Lens Type	Fixed

Storage

Local Storage Support	No
-----------------------	----

Video intelligence

Basic Alarm Detection	Motion
-----------------------	--------

General

Video Output	HD-TVI
Video Standard	PAL

Electrical

Power supply type	VDC
Power supply value	12 VDC
Power consumption	5 W
Current consumption	0.417 A
Power source:	12 VDC
Power consumption:	5 W
Current:	417 mA

Physical

Form Factor	Bullet
Physical dimensions	155 x 59 mm
Net weight	370 g
Colour	Grey

Environmental


Operating temperature	-40 to +60°C -40 to +140°F
Vandal proof	No
Environment	Outdoor
IP-rating	66

Standards & regulation

Compliance	UL, CE, FCC, REACH, RoHS, HALT, WEEE
------------	--------------------------------------

Environmental & Physical

Weight:	370 g (0.82 lbs)
Dimensions:	154.5 x 58.5 mm (6.08 x 2.3 in.)
Operation temperature:	-40 to +60° C (-40 to +140° F)
Environmental rating:	IP66

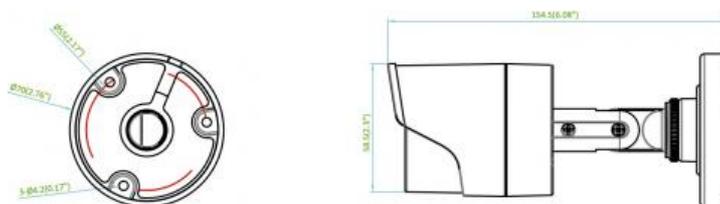

unit : mm

As a company of innovation, UTC Technologies reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Technologies online or contact your sales representative.



United Technologies

Climate | Controls | Security