

TVM-2002

TRUVISION 20" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920 x 1080

Overview

The LED TVM range of monitors is the latest advancement in TruVision monitors. Providing superior image quality through HDMI, VGA and BNC connections, these monitors are a great fit for today's demanding video surveillance market. Whether displaying analog or IP resolutions, these monitors are designed to provide top image quality paired with industrial reliability. These monitors are designed to perform 24/7 and are design with security applications in mind.

Capabilities

The TVM-2002 is a 20" class monitor, offering HDMI, VGA and BNC connections. The monitor has two built in speakers and is provided with VESA wall mount holes, making them easy to combine with a variety of TruVision mounting accessories. The on screen display allows for full control of images settings such as brightness, contrast and colour temperature.



Details

- 20" LED Backlight
- Full HD resolution
- 16:9 aspect ratio
- 1920 x 1080 recommended resolution
- 3,000:1 contrast ratio for crisp images
- 3D comb filter for optimal image quality
- Multiple inputs including BNC, VGA, HDMI
- BNC analog input

TVM-2002

TRUVISION 20" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920 x 1080

Technical Specifications

Display

Screen Size	19.53"
Aspect Ratio	16:9
Contrast Ratio	3,000:1
Viewing Angle (H/V)	178° / 178°
Response Time	20ms
Brightness	250 cd/m ² (typ)
Recommended Resolution	1920 x 1080 @ 60 HZ
Video Compatibility	NTSC/PAL Auto Detect

Audio

Speaker Power	1.5W x 2
Speakers	Built-in

Interface

BNC Video I/O	1/1
VGA Video In (15-pin d-sub)	Yes
HDMI Video In	1
RCA Audio In	1
PC Stereo In	Yes
Head Phone Out	No

Operations

Controls	Power, Up/Down, Left/Right, Source, OSD Menu
OSD	English, French, Spanish, German, Italian, Portuguese, Netherlands, Russian, Turkish, Polish
Remote Control Support	Yes

General

Technology	LED
Filter Type	3D Combfilter, Deinterlace
Panel Lamp Life	30,000 hours
VESA compatibility	100 x 100 mm
Accessories Included	Manual, Power Cord, Remote Control

Electrical

Power supply type	12 VDC
Power supply value	100 to 240 VAC
Power consumption	<30W

Physical


Housing Type	Plastic
Physical dimensions	473mm x 342mm x 170mm
Net weight	2.8 kg
Shipping weight	3.6 kg
Colour	Black

Environmental

Operating temperature	0 to 40°C
Storage temperature	-20 to 60°C
Relative humidity	10 to 85%
Environment	Indoor

Standards & Regulations

Compliance	CE
------------	----

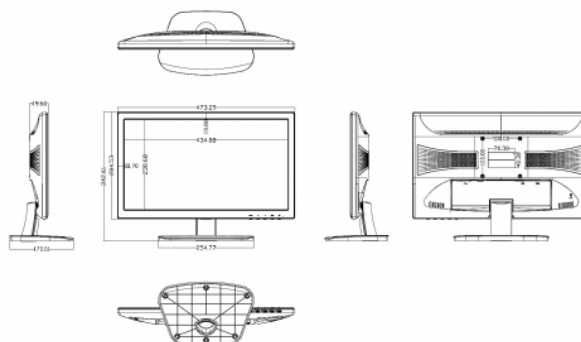

As a company of innovation, UTC Technologies reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Technologies online or contact your sales representative.