

TVM-3202

TRUVISION 32" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920X1080

Overview

The LED TVM range of monitors is the latest advancement in TruVision monitors. Providing superior image quality through HDMI, VGA and BNC connections, these monitors are a great fit for today's demanding video surveillance market. Whether displaying analog or IP resolutions, these monitors are designed to provide top image quality paired with industrial reliability. These monitors are designed to perform 24/7 and are design with security applications in mind.

Capabilities

The TVM-3202 is a 32" class monitor, offering HDMI, VGA and BNC connections. The monitor has two built in speakers and is provided with VESA wall mount holes, making them easy to combine with a variety of TruVision mounting accessories. The on screen display allows for full control of images settings such as brightness, contrast and colour temperature.



Details


- 32" LED Backlight
- Full HD resolution
- 16:9 aspect ratio
- 1920 x 1080 recommended resolution
- 1,000:1 contrast ratio for crisp images
- 3D comb filter for optimal image quality
- Multiple inputs including BNC, VGA, HDMI
- BNC analog input

TVM-3202

TRUVISION 32" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920X1080

Technical Specifications

| Display | |
|--|--|
| Screen Size | 31.5" |
| Aspect Ratio | 16:9 |
| Contrast Ratio | 1,000:1 |
| Viewing Angle (H/V) | 178° / 178° |
| Response Time | 8ms |
| Brightness | 300 cd/m ² (typ) |
| Recommended Resolution | |
| Video Compatibility | NTSC/PAL Auto Detect |
| Audio | |
| Speaker Power | 2W x 2 |
| Speakers | Built-in |
| Interface | |
| BNC Video I/O | 1/1 |
| VGA Video In (15-pin d- | Yes |
| sub) | |
| HDMI Video In | 1 |
| RCA Audio In | 1 |
| PC Stereo In | Yes |
| Head Phone Out | No |
| Operations | |
| Controls | Power, Up/Down, Left/Right, Source, OSD |
| | Menu |
| OSD | English, French, Spanish, German, Italian, Portuguese, Netherlands, Russian, Turkish, Polish |
| Remote Control Support | Yes |
| General | |
| Technology | LED |
| Filter Type | 3D Combfilter, Deinterlace |
| Panel Lamp Life | 30,000 hours |
| VESA compatibility | 100 x 100 mm |
| Accessories Included | Manual, Power Cord, Remote Control |
| Electrical | |
| | 100 to 240 VAC |
| Power supply type | 100 to 240 VAC <45W |
| Power consumption | <+J¥¥ |
| Physical | |
| Housing Type | Plastic |
| Physical dimensions | 729mm x 551 mm x 245mm |
| Net weight | 8.2 kg |
| Shipping weight | 10.5 kg |
| Colour | Black |
| Environmental | |
| Or a resting of the many a rest, was | 0 to 40°C |
| Operating temperature | |
| Storage temperature | -20 to 60°C |
| | -20 to 60°C 10 to 85% |
| Storage temperature | |
| Storage temperature Relative humidity | 10 to 85% Indoor |

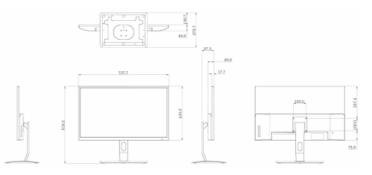

As a company of innovation, UTC Technologies reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Technologies online or contact your sales representative.

