Product Data Sheet



TVR15HD

TruVision™ DVR 15 HD, HD-TVI Hybrid 8/16 channel recorder

Overview

The TruVision DVR 15HD (TVR 15HD) is a cost-effective HD Hybrid video recorder capable of recording up to 8 or 16 camera inputs.

This HD Hybrid recorder is uniquely qualified to upgrade existing analog installations, offering a competitive and practical solution for the market of HD analog, standard analog and hybrid recorders.



A true HD hybrid

Using the open HD-TVI technology, TVR 15HD can connect any HD-TVI camera, offering resolutions up to 5 MPX over existing coax cable.

Next to HD-TVI, TVR 15HD also connects standard analog cameras, allowing reuse of existing analog cameras which do not yet need to be replaced/upgraded.

Finally, TVR 15HD is capable of connecting TruVision IP cameras to all its channels. The IP cameras can have a resolution of up to 4 MPX.

HD-TVI technology

HD-TVI allows you to run an analog signal (up to 5 Mpx) over existing standard coax cabling, following the same specifications as for standard analog systems today. Additionally, TVR 15HD allows you to access the local onscreen-display menu of TruVision HD-TVI cameras through over-the-coax control. This saves time in setup and facilitates maintenance afterwards. Also TruVision HD-TVI PTZ cameras can be controlled over the coax.

Intrusion integration

TVR 15HD has an alarm receiver module embedded inside. The alarm message receiver can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format. Alarm messages, disarming and arming messages can be send from the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output, send an email or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.

Standard Features

- Linux embedded Plug and Play configuration
- Supports standard analog, HD-TVI and IP technology
- Up to 8/16 analog cameras
- Up to 8/16 IP cameras (when disabling all analog channels)
- Up to 5 Mpx HD-TVI camera support
- Up to 4 Mpx IP camera support
- · Support for ONVIF Profile S IP cameras
- Over-the-coax control for TruVision fixed/PTZ HD-TVI cameras
- · Use existing coax cabling for HD-TVI cameras
- New icon based front panel
- Real time Full HD recording
- Up to 8/12 TB internal storage
- Reverse video playback
- USB video export
- Start-up wizard for guick and easy installation
- HDMI, VGA and BNC video (event only) outputs
- V-stream support
- Front panel controls
- Operations through OSD/browser/software
- Integration of UTC IP intrusion panels via SIA/XSIA reporting
- TruVision Navigator license free client/host or standalone appliacation
- TVRmobile app for iOS and Android
- IP keypad support

TVR15HD

TruVision™ DVR 15 HD, HD-TVI Hybrid 8/16 channel recorder

Specifications

Video/Audio input

Video/Audio input	
Analog camera input:	Up to 8/16 channels; automatic detection of analog and HD-TVI
IP camera input:	Up to 8/16 channels (with all analog channels disabled)
HD-TVI camera resolutions supported:	720P, 1080P, 3 MPX, 5 MPX
IP camera resolution supported:	Up to 4 MPX
Maximum bit rate per channel:	Analog: Up to 8 Mbps (main stream)/Up to 3Mbps (sub stream) IP: follow capacity of IP camera but will not exceed 16 Mbps
Video compression standards supported:	H.264
Audio input:	4-ch, RCA (2.0 Vp-p, 1 KOhm)
Onvif support:	Yes, version: Profile S
Video/audio output	
BNC output:	1-ch, BNC (1.0 Vp-p, 75 Ohm) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC); event only
HDMI output resolutions:	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz
HDMI version:	HDMI 2.0 (compatible with 1.4)
VGA output resolutions:	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz
Playback resolution:	Up to Full HD
Audio output:	1-ch, RCA (Linear, 1 KOhm)
Synchronous playback OSD:	Up to 8/16 channels
Simultaneous playback browser:	Up to 8/16 tiles
Reverse playback OSD:	Up to 1 channel
Recording	
Recording resolution:	5 MPX (HD-TVI only) / 4 MPX (IP only) / 3 MPX / Full HD 1080P / 720P / 960H / VGA / 4CIF / DCIF / 2CIF/ CIF / QCIF
SATA:	2 SATA interfaces
Maximum onboard storage capacity:	8TB (8 channel) /12TB (16 channel)
Recording modes:	Time Lapse High, Time Lapse Low, Event, Alarm, Manual
Networking	
Network interface:	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
ezDDNS:	Yes
DDNS:	Yes
no-IP.com:	Yes
Total viewing streams available:	128
Maximum total incoming/ outgoing bandwidth (combined):	128 Mbps
External interface	
Serial interface:	1 RS-232 interface (configuration, maintenance)/ 1 RS485 (PTZ control)
USB interface:	Front: 1 x USB 2.0 / Back panel: 1x USB 3.0
Alarm interface:	8 channel: 8 alarm in, 4 relay out / 16 channel: 16 alarm in, 4 relay out
General	
Power supply:	12 VDC (External PSU included)
Power consumption (without hard disk):	Less than 20W
Operating temperature:	-10 °C to +55 °C (14 °F to 131 °F)
Operating humidity:	10% to 90%
Chassis:	1 U desk-based chassis
Dimensions (W x D x H):	380 x 320 x 48 mm
Weight (without hard disk):	Less than 2 kg
Rack mountable:	Yes, rack ears included
Operations	
Local:	Front panel / IR remote / USB mouse


Part No.	Description
TVR-1504CHD-1T	TruVision™ DVR 15c HD, HD-TVI Hybrid 4 channel compact recorder, 1TB
TVR-1504CHD-2T	TruVision™ DVR 15c HD, HD-TVI Hybrid 4 channel compact recorder, 2TB
TVR-1504CHD-4T	TruVision™ DVR 15c HD, HD-TVI Hybrid 4 channel compact recorder, 4TB
TVR-1508HD-2T	TruVision™ DVR 15 HD, HD-TVI Hybrid 8 channel recorder, 2TB
TVR-1508HD-4T	TruVision™ DVR 15 HD, HD-TVI Hybrid 8 channel recorder, 4TB
TVR-1508HD-8T	TruVision™ DVR 15 HD, HD-TVI Hybrid 8 channel recorder, TB
TVR-1516HD-2T	TruVision™ DVR 15 HD, HD-TVI Hybrid 16 channel recorder 2TB
TVR-1516HD-4T	TruVision™ DVR 15 HD, HD-TVI Hybrid 16 channel recorder 4TB
TVR-1516HD-8T	TruVision™ DVR 15 HD, HD-TVI Hybrid 16 channel recorder 8TB
T\/P_1516HD_12T	TruVision M DVR 15 HD HD TVI Hybrid 16 channel recorder

Remote:

IP keypad / Browser interface / TruVision Navigator / TVRmobile

TVR-1516HD-12T TruVision™ DVR 15 HD, HD-TVI Hybrid 16 channel recorder, 12TB



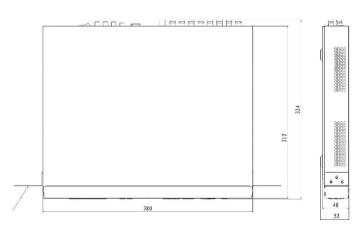



As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative. TVR15HD-2017-02-10 15:08:40 Released :06-FEB-17