

RS-422 Copper Wire Comm Card

00BA0302

Description

The Silver Network RS-422 Copper Wire communications card enables compatible devices to communicate with the Network Manager software via twisted-pair interfaces.


Not compatible with “Gen2” devices (FlexZone, Senstar LM100, FiberPatrol FP400 or UltraWave).

Specifications

- A and B side connectors (Rx/Tx)
- Size: 78 x 124 x 18 mm (3.1 x 4.9 x 0.7 in) (not including connectors)
- Weight: 80 g (2.8 oz)
- Operating temperature: -40 to 70 °C (-40 to 158 °F)

Regulatory Compliance

- CE
- FCC 47 CFR Part 15, Subpart B
- REACH

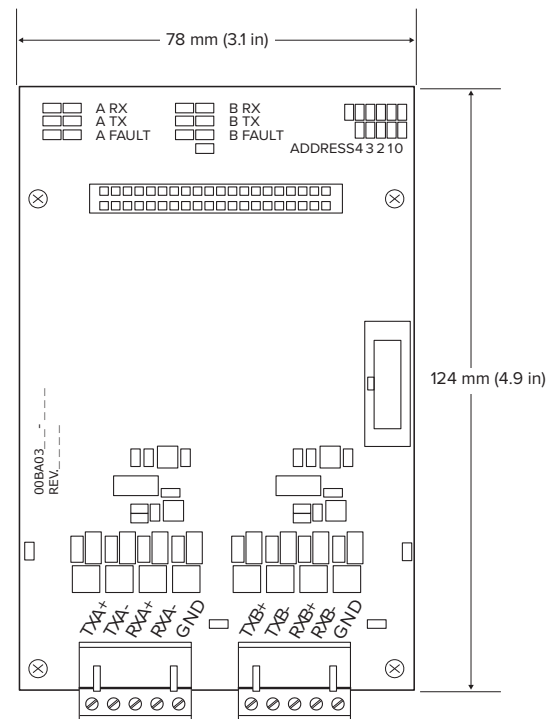

See the OmniTrax or XField Datasheet for a full system description.

info@senstar.com • senstar.com