

# Armored FlexZone<sup>®</sup> Sensor Cable **SENSTAR**<sup>™</sup>

G6FG0200

---

## Description

Armored FlexZone sensor cable is the standard Senstar FlexZone sensor cable enclosed in flexible aluminum armor. For information on the sensor cable itself, refer to the *FlexZone Sensor Cable Technical Specification*.

## Physical Characteristics

- 5154A marine grade aluminum
- Cable outside diameter: 15.24 mm (0.6 in)
- Length: 152 m (500 ft)
- Weight: 17.2 kg/150 m (37.8 lb/500 ft)
- Minimum bend radius: 15 cm (6 in)

## Cable Reel Specifications


- Reel dimensions (diameter/height): 45 x 28 cm (17.75 x 13.25 in)
- Reel weight (including cable): 22.7 kg (50 lbs)
- Arbor hole diameter: 4 cm (1.57 in)

## Environmental Specifications

- Temperature (operating): -40 to 70 °C (-40 to 158 °F)
- Humidity (operating): 100% (condensing)

## Regulatory Compliance

- CE (RoHS 3)

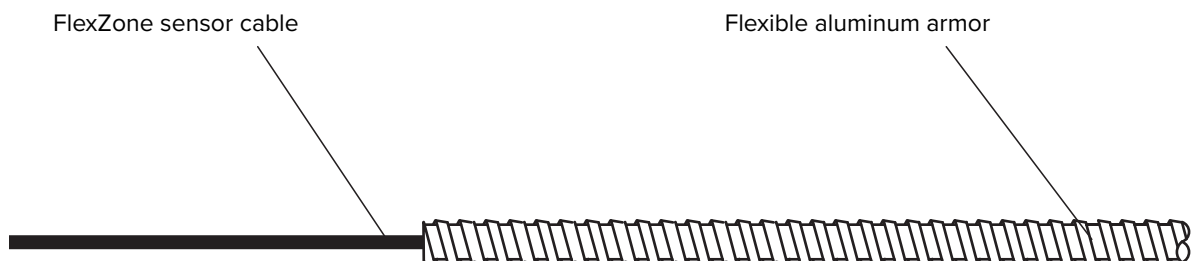

*See the FlexZone Datasheet for a full system description*