




## AD1000x10

plug-in module EV/VE/DD1000 (10-pack)

The AD1000 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the following detectors: EV1000 series / VE1000 series / DD1000 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD1000 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

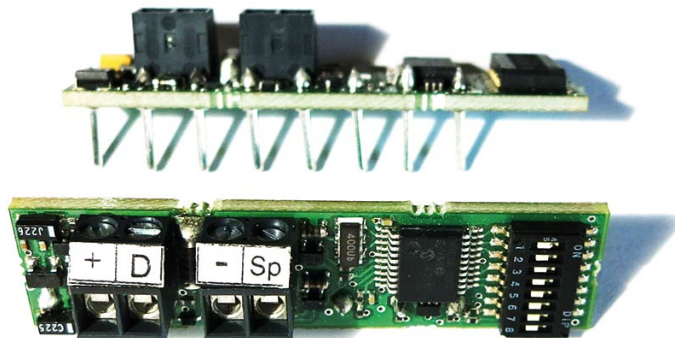

### Standard Features

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

# AD1000x10

plug-in module EV/VE/DD1000 (10-pack)

## Specifications

Supply voltage	9 to 24 VDC (12 V nominal)
IADS-bus voltage	12 or 24 VDC
Min. current consumption at 13.4 VDC	400 $\mu$ A
Max. current consumption at 13.4 VDC	900 $\mu$ A
Bus current consumption out of bus	approx. 75 $\mu$ A
Max. current capacity output day/night	200 mA
Max. current capacity output walk test	200 mA
Device type / Category	T3 / PIR
Address range	0 to 31

## Ordering Information

Part No.	Description
AD1000x10	plug-in module EV/VE/DD1000 (10-pack)

