




AD600

plug-in module DD600

The AD600 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the DD600 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD600 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

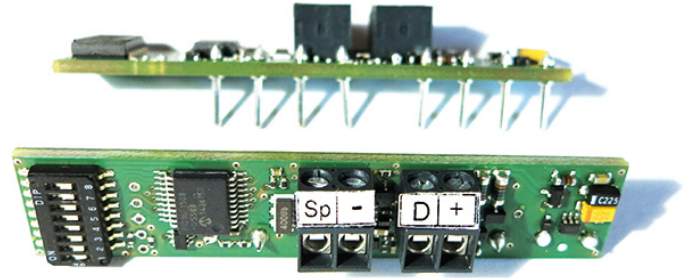

Standard Features

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

AD600

plug-in module DD600

Specifications

Supply voltage	9 to 24 VDC (12 V nominal)
IADS-bus voltage	12 or 24 VDC
Min. current consumption at 13.4 VDC	400 μ A
Max. current consumption at 13.4 VDC	900 μ A
Bus current consumption out of bus	approx. 75 μ A
Max. current capacity output day/night	200 mA
Max. current capacity output walk test	200 mA
Device type / Category	T3 / PIR
Address range	0 to 31

Ordering Information

Part No.	Description
AD600	plug-in module DD600

