



## AD044

External "addressable security system" interface



### Standard Features

- 2/4 wire external interface
- Four inputs to monitor non-addressable devices
- Four outputs
- If needed powered through auxiliary power supply
- Used for any sensor

# AD044


External "addressable security system" interface

## Specifications

Bus protocol	GE property
Bus voltage	12 VDC or 24 VDC
External power supply	9 to 13.8 VDC
Current consumption from Bus	290 microA
Unit load for DGP	1
Address range	0 to 255
Open collector current output	100 microA max.
Output current	500 mA max. each
Dimensions (W x H x D)	173 x 122 x 51 mm
Ambient conditions	0 to 55°C; max. 90% relative humidity

## Ordering Information

Part No.	Description
AD044	External "addressable security system" interface

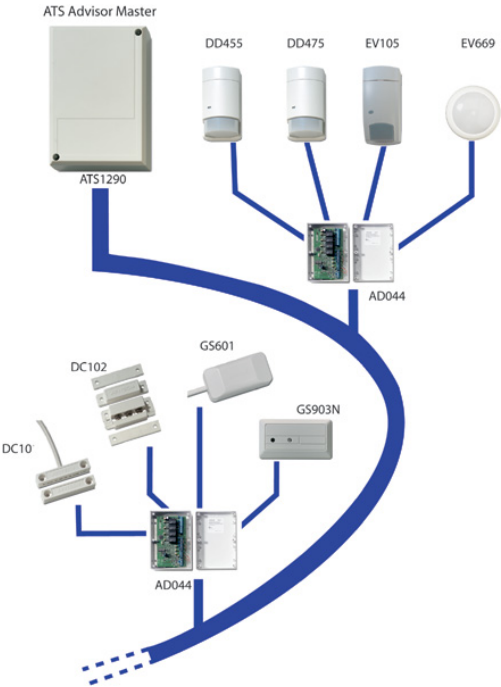

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [UTC Fire & Security](#) online or contact your sales representative.  
AD044-2016-12-7 03:10:31 Released :29-AUG-11