

# 2X-AT-F2

## Addressable fire panel w touchscreen, 2 loop

### Overview

The new 2X-A series life safety control systems bring the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. Based on 2X series learned experience and with complete backwards compatibility, the new 2X-A features an attractive contemporary design that fits with any decor. With improved robustness, manufactured in metal, special plastics and easy electronics removal, it allows painting in any colour. The main controls are easily located using an improved and robust jog dial.

With high power loop addressable detection, a full line of easily configured option cards and modules, as well as USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

This version of 2X-A panels includes a 7 inches touchscreen improving the user experience thanks to the more intuitive user interface.

### The Panel

The fire panels supplied in local language, with user interface, with 2 High Power Loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

### Options


The panel supports an extra 2 High Power Loop board that brings the panel to up to 512 devices with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire repeater panels up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

High loop power PAK available to increase the loop power from 500 mA to 800 mA.

Compatible with existing loop devices and network compatible with existing panels, repeaters (existing and new) and conventional panels.

### Approvals & compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- WEEE / RoHS compliant

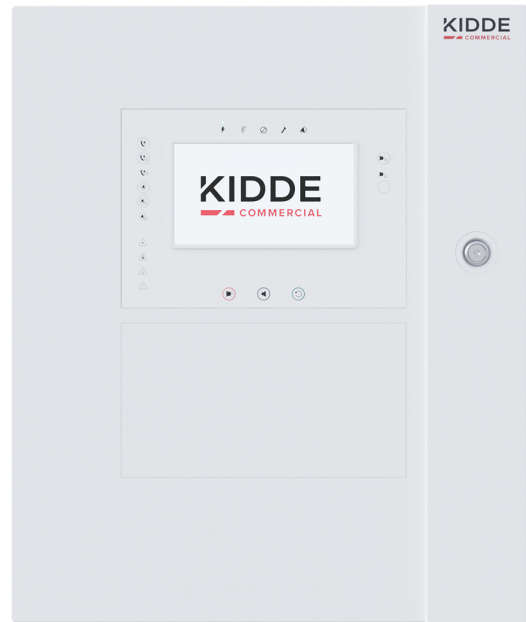

### Details

- 2 High Power Loops expandable to 4 with 500 mA per loop
- 7" touchscreen
- High loop power PAK to increase the loop power from 500 mA to 800 mA
- Up to 512 zones and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Improved Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with robust painted steel door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- Up to 72 hours standby time and 30 minutes alarm
- Auxiliary 24 VDC supply output with reset support
- 3 USB ports with memory stick support and RS232 for printer support
- Communication via UltraSync cloud, using EN 54-21 UC240 UltraSync communicator
- Integration in management software ATS8600, allowing integration with security systems and CMS
- 3 operator level menu structure (20 usernames and passwords)
- Email notification for events directly from the panel (4 user accounts)

# 2X-AT-F2

## Addressable fire panel w touchscreen, 2 loop

### Technical specifications

#### General

User interface	Without fire Brigade controls
Maximum system capacity (device count)	up to 32512
Network size (nodes)	up to 64

#### Electrical

Power supply type	VAC
Operating voltage	110 / 240 VAC (+10%/-15%) Mains supply cable type: 3 x 1.5 mm <sup>2</sup> (live, neutral, earth)
Current consumption	Nom. 0.6 / 1.3 A, Max. 1.5 A / 3.15 A

#### Loop

Maximum loop capacity	4
Type and rating	500 mA expandable to 800 mA at 37 VDC (28 to 37 VDC)
Cable rating	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair ; 52 ohm / 500 nF ; max. 2 km
Outputs	250 mA / 29VDC (29VDC to 36VDC)

#### Zone

Maximum zone capacity	up to 512
-----------------------	-----------

#### Input

Input quantity	2
Input type and rating	Supervised, maximum load 150 mA
Programmable	2
Termination	15 kohm

#### Output

Fire alarm signalling	350 mA / 21 to 28 VDC (24 VDC nominal)
Fault signalling	350 mA / 21 to 28 VDC (24 VDC nominal)
Notification	8 sounder outputs
Supervisory voltage	Supervised, 4, 750 mA / 21 to 28 VDC (24 VDC nominal)
Auxilliary power	1 resetable, 500 mA / 21 to 28 VDC (24 VDC nominal)
Programmable	Up to 8 (2 per loop board) / 21 to 28 VDC (24 VDC nominal)
Termination	15 kohm
General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)

#### Standby battery

Capacity	Max. 2 x 12 V / 18 Ah (use supplied cables)
Charging	27.3 V at 20°C ; 36 mV/°C
Low battery warning threshold	23.6 VDC ± 1% at 25°C
Batteries supported in housing	Max. 2 x 12 V / 18 Ah (use supplied cables)

#### Physical

Form factor	Large
Physical dimensions	446 x 536 x 164 mm (W x H x D)
Net weight	7.4 kg (without battery)
Shipping weight	10.1 kg
Colour	White (RAL 9003)
Mounting type	Surface mount
Cable entries	18 (20 mm) / 2 (20 mm) / 2 removable plates (top / bottom / back)
Material	Steel (painted)

#### Environmental

Operating temperature	-5 to +40°C
Storage temperature	-20 to +50°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP30, indoor use only

#### Regulatory

Compliance	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 19 December 2023 - 9:34