


CODE: **PSUPS 10A12C** v.1.0/III

EN\*\*

TYPE: **PSUPS 13,8V/12V/10A/17Ah Buffer** power supply for 8 HD cameras and recorder

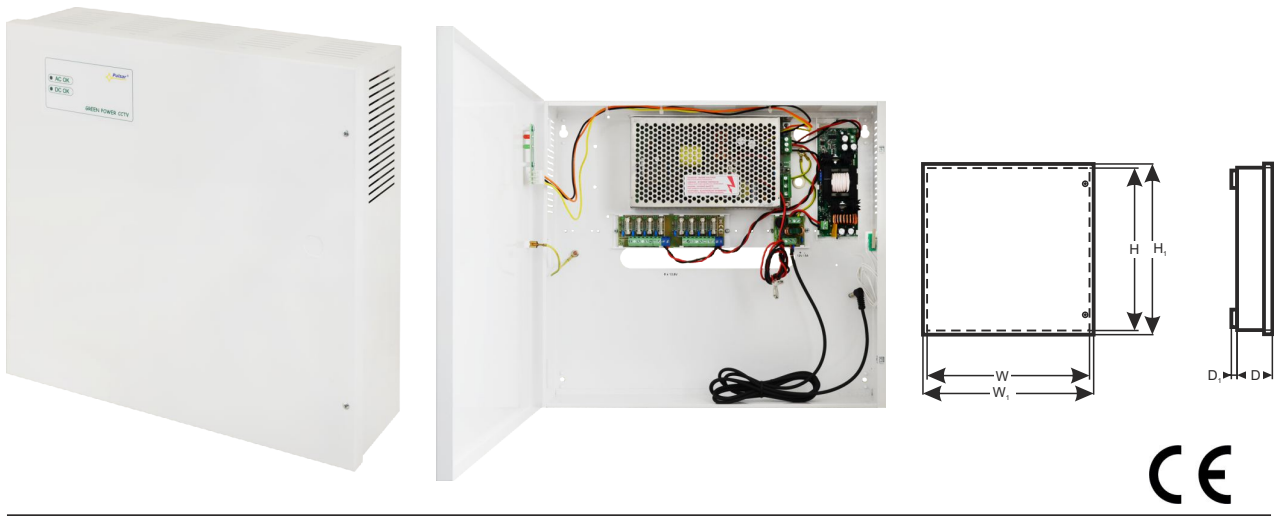

### Features:

- DC 13,8V uninterruptible power supply of HD cameras
- DC 12V uninterruptible power supply of the recorder
- fitting battery 17Ah/12V
- wide range of mains supply AC 176÷264V
- high efficiency 80%
- 8 outputs protected by 1A glass fuses for powering HD cameras
- 12V/4A output dedicated to supply the recorder
- battery charge and maintenance control
- battery charging current 1A
- Approximate backup time: 1h 30min
- deep discharge battery protection (UVP)
- battery output protection against short circuit and reverse polarity connection
- LED indication
- protections:
  - SCP short-circuit protection
  - OLP overload protection
  - OVP over voltage protection
  - surge protection
  - against sabotage
- warranty – 2 years from the production date

### DESCRIPTION

A buffer PSU is intended for an uninterrupted supply to CCTV system devices requiring stabilized voltage of **12V DC (+/-15%)**. The PSU has two circuits: first **1x4A/12VDC** for supplying the recorder and **8x0,75A/13,8V DC** for both cameras. Current efficiency of the PSU amounts to:

**Output current 8x0,75A + 4A recorder + 1A battery charging \***

**Total current of the receivers + battery 11A\* max.**

In case of a mains power loss 230V a battery back-up is activated immediately.

The approximate backup time is given assuming that all output ports are used (using typical devices and 17Ah batteries). The electricity consumption for own needs and the energy efficiency of the power intake track were taken into account. The exact description of how to perform the calculations can be found at: ["Approximate backup time - assumptions for calculations"](#).

The PSU is mounted in a metal enclosure (RAL 9003 colour) that accommodates a 17Ah/12V battery. The enclosure is equipped with a micro-switch indicating unwanted opening of the door (faceplate).

\* See chart 1

<b>SPECIFICATIONS</b>	
PSU type	A (EPS - External Power Source)
Mains supply	176÷264V AC / 50Hz
Current consumption	1,3A @230V AC
PSU's power	140W
Efficiency	80%
Output voltage – strips fuse base 16x	11V ÷ 13,8V DC – buffer operation 9,5V ÷ 13,8V DC – battery-assisted operation
Output voltage – recorder	<b>12V DC</b> maintained regardless of the state of battery charge
<b>Output current <math>t_{AMB}&lt;30^{\circ}\text{C}</math></b>	<b>8x0,75A + 4A recorder + 1A battery charging*</b> <b>Total current of the receivers + battery 11A* max.</b> <b>* see chart 1</b>
<b>Output current <math>t_{AMB}=40^{\circ}\text{C}</math></b>	<b>8x0,3A + 4A recorder + 1A battery charging *</b> <b>Total current of the receivers + battery 8A* max.</b> <b>* see chart 1</b>
Output voltage adjustment range	12÷14V DC
Ripple voltage	120mV p-p max.
PSU current consumption	0,2A
Battery charging current	1A
Approximate backup time	1h 30min
Short-circuit protection SCP	STRIP LB8: 8x F 1A glass fuse, STRIP LB1: 1xF 5A
Overload protection OLP	105% ÷ 150% of the PSU power, automatic recovery
Battery circuit protection SCP and reverse polarity connection	glass fuse 15A
Surge protection	varistors
Over voltage protection OVP	>16V (automatic return)
Deep discharge protection UVP	U<9,5V (± 5%) – disconnection of battery terminal
Sabotage protection: - TAMPER output indicating enclosure opening	- micro-switches, NC contacts (enclosure closed), 0,5A@50V DC (max.)
Optical indication: front panel of the PSU - AC OK.; LED indicating the AC power status - DC OK.; LED indicating the DC supply at the PSU output	- red, normal status – on, failure: off  - green, normal status – on, failure: off
Operating conditions	2nd environmental class, -10°C ÷ +40°C
Enclosure	Steel plate DC01 1,0mm, RAL 9003
Dimensions	W=400, H=350, D+D <sub>1</sub> =92+8 [+/- 2mm] W <sub>1</sub> =405, H <sub>1</sub> =355 [+/- 2mm]
The dimensions of the battery compartment	180x170x80mm (WxHxD) max
Net/gross weight	4,3 / 4,6 kg
Closing	Cheese head screw x 2 (at the front), lock assembly possible
Deklarations, warranty	CE, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led.

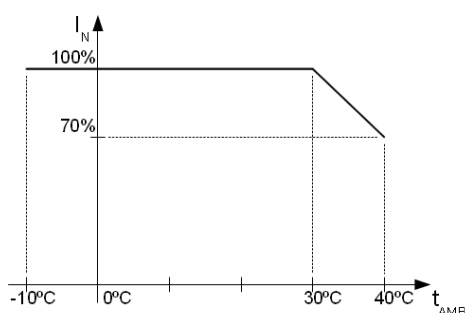


Chart 1. Acceptable output current from the PSU depending on ambient temperature.