

# TVB-5712

**TruVision IP Bullet Camera, H.265, 2MP, 8-32mm motorized lens, Super Low Light, WDR, true D/N, 100m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE+ (802.3-at) /12VDC,**

## Overview

---

The TruVision Series 7 IP bullet cameras with smart event capabilities available in 2, 4, 8 and 12MP resolution deliver high-quality images thanks to their extreme low light sensitivity and enhanced image processing. The rich set of features make these cameras the ideal choice for demanding security, surveillance and monitoring applications.

The cameras support up to 10 configurable video streams which allow users to optimize the camera's remote live view capabilities while controlling the bandwidth usage. The motorized varifocal lens with P-iris technology allows users to remotely adjust the zoom level and focus to get crisp images anytime anywhere. In addition to the compatibility with other TruVision products and 3rd party VMS software, the cameras also support NAS recording or local MicroSD card recording to protect data in the event of network disruptions.

The enhanced embedded video intelligence capabilities go above and beyond standard event detection allowing operators to receive real-time event notifications and reduce the time needed for post-incident investigation.



## Details

---

- Maximum Resolution: 1920 x 1080
- H.265, H.264 and MJPEG compression
- 10 independent configurable video streams
- Motorized zoom lens 2.8 to 12 mm with auto-focus
- P-iris lens
- ONVIF Profiles S, G and T
- Rich video intelligence (VCA)
- Up to 50 m IR illumination
- Up to 140 dB Wide Dynamic Range
- Edge recording up to 256 GB with optional SD card

# TVB-5712

TruVision IP Bullet Camera, H.265, 2MP, 8-32mm motorized lens, Super Low Light, WDR, true D/N, 100m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE+ (802.3-at) /12VDC,

## Technical specifications

### General

Technology	IP
Video standard	NTSC, PAL
Image settings	De-Fog, Electronic Image Stabilization, Hallway View, Mirror
Privacy masking	8 zones
Video output	BNC (for installation only)
Software compatibility	Milestone XProtect, OnGuard, TruVision Navigator, TVRmobile, UltraView, Web Browser

### Camera

Sensor size	1/1.8"
Max. resolution	2 MP
Sensor scan	Progressive
Sensor type	CMOS
Shutter time	1 to 1/100,000 s

### Lighting performance

WDR type	True WDR
WDR	140 dB
Digital noise reduction	3D DNR
Day/night	True Day/Night
Motorized IR cut filter	Yes
Color sensitivity	0.002 Lux @ (F1.2, AGC ON)
B/W sensitivity	0.0002 Lux @ (F1.2, AGC ON), 0 lux with IR ON
B/W trigger	Auto/Schedule/Triggered by alarm in
Infrared (IR)	Yes
IR range	Up to 100 m

### Encoding

Video streams	10
Main stream compression	H.264, H.265
Sub stream compression	H.264, H.265, MJPEG
Third stream compression	H.264, H.265, MJPEG
Video bit rate	32 to 16 Mbps
Main stream resolutions	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p)
Sub stream resolutions	640 x 480 (VGA), 704 x 576 (4CIF)
Third stream resolutions	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 640 x 480 (VGA), 704 x 576 (4CIF)
Max. resolution @ fps	1920 x 1080 @ 25/30 fps
4th to 10th stream compression	H.265, H.264, MJPEG
4th stream resolutions	1920 x 1080 (1080p), 1280 x 720 (XVGA), 704 x 576 (4CIF), 640 x 480 (VGA)
5th stream resolutions	704 x 576 (4CIF), 640 x 480 (VGA)
6th to 10th stream resolutions	1920 x 1080 (1080p), 1280 x 720 (XVGA), 704 x 576 (4CIF), 640 x 480 (VGA)

### Lens

Lens type	Varifocal motorized
Focal length	8 to 32 mm, Horizontal FoV 42.5° to 13.4°, Vertical FoV 23.4° to 7.7°, Diagonal FoV 49° to 15.3°
Auto iris	Yes
Auto focus	Yes
Motorized zoom	Yes
Auto-iris	P-iris

### Network

Network interface	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integration	CGI, ISAPI, ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Supported network protocols	802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP
Security	Password protection, HTTPS encryption, 802.1x authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.2

### Audio

Audio compression	G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, MP3, PCM
Audio in	1 line in/mic.in
Audio out	1 line out

### Alarm I/O

Alarm inputs	2
Alarm outputs	2 outputs (24 VAC/VDC, 1A max)
Alarm I/O connection	Terminal blocks

### Storage

Local storage support	Yes
Local storage type	Built-in Micro SD/SDHC/SDXC card slot
Max. SD card capacity	256 GB
Additional storage options	NAS (NFS,SMB/CIFS)

### Video intelligence

Alarm trigger	HDD error, HDD full, Invalid login, IP address conflict, Network disconnected
ROI	Up to 4 fixed regions for one of 5 the first streams Dynamic region for face tracking
Video analytics	Advanced motion detection, Audio exception detection, Defocus, Face detection, Intrusion detection, Line crossing detection, Object removal detection, Region entrance detection, Region exiting detection, Scene change detection, Unattended baggage detection

# TVB-5712

TruVision IP Bullet Camera, H.265, 2MP, 8-32mm motorized lens, Super Low Light, WDR, true D/N, 100m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE+ (802.3-at) /12VDC,

## Electrical

Operating voltage	12 VDC $\pm$ 20%, three-core terminal block, reverse polarity protection / PoE (802.3at, class 4)
Power consumption	12 VDC, 1.13 A, max. 13.5 W; PoE (802.3at, 42.5 V to 57 V), 0.42 A to 0.32 A, max. 18 W With external load connected to camera power output: 12 VDC, 1.33 A, max. 15.9 W; PoE (802.3at, 42.5 V to 57 V), 0.50 A to 0.37 A, max. 21.2 W

## Physical

Physical dimensions	$\Phi$ 144 x 347 mm $\Phi$ 5.7 x 13.7 in.
Net weight	2450 g 5.40 lb.
Colour	Grey
Form Factor	Bullet

## Environmental


Impact rating	IK10
Environment	Outdoor
Operating temperature	-40 to +65°C -40 to +149°F
Relative humidity	<95% (non-condensing)
IP rating	IP67

## Regulatory

Compliance	CE, FCC, REACH, RoHS, UL, WEEE
------------	--------------------------------

## Accessories

TVB-CM	TruVision Corner Mount bracket for S6 and S7 bullet cameras
TVB-PM	TruVision Pole Mount bracket for S6 and S7 bullet cameras

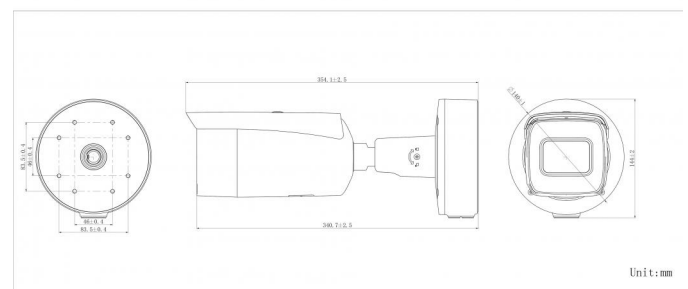

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 8 January 2021 - 14:13

