

# TVFC-M01-0401-TUR-G

## TruVision 4MP Full color IP 2.8mm lens Turret Camera, 30m white light, mic

### Overview

---

TruVision Full Color IP cameras offer a number of advantages over traditional IP cameras. The cameras available in 4 and 8 megapixel, capture full color video, allowing for clearer and more accurate identification of people and objects in the field of view. This is especially useful in low light conditions, where traditional IP cameras may produce footage that is difficult to interpret due to the lack of color.

The built-in supplemental white light available on most models, ensures that even in complete darkness, the cameras are able to capture clear and usable footage. This makes them ideal for use in a variety of settings, including outdoor areas or poorly lit indoor spaces.

Overall, this new range of TruVision Full Color IP Surveillance cameras are a reliable and advanced choice for any surveillance system, providing high quality, full color video footage that can aid in the identification and detection of potential threats or incidents.



### Details

---

- Maximum resolution: 4MP (2688 x 1520)
- 24/7 color images
- Built-in supplemental white light up to 30 m
- Person/vehicle classification
- Video intelligence: intrusion detection, cross line detection, entry/exit detection, face capture
- Built-in microphone
- H.265+ compression
- ONVIF Profile G, S, T open standards
- Edge recording up to 256 GB SDHC card

# TVFC-M01-0401-TUR-G

## TruVision 4MP Full color IP 2.8mm lens Turret Camera, 30m white light, mic

### Technical specifications

<b>Geral</b>		<b>Rede</b>	
Technology	IP	Network interface	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Video standard	NTSC, PAL	Integration	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Image settings	De-Fog, Hallway View, Mirror, ROI (Region Of Interest)	Supported network protocols	802.1x, ARP, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, SSL/TLS, TCP/IP, UPnP
Privacy masking	Yes		
Software compatibility	Milestone XProtect, TruVision Navigator, TVRmobile, Web Browser		
<b>Câmera</b>		<b>Áudio</b>	
Sensor size	1/1.8"	Audio compression	G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, PCM
Max. resolution	4 MP	Audio in	Built-in microphone
Sensor scan	Progressive	Audio bit rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps
Sensor type	CMOS		
Shutter time	1/3 to 1/100,000 s		
<b>Desempenho de iluminação</b>		<b>Armazenamento</b>	
WDR	130 dB	Local storage type	Built-in Micro SD/SDHC/SDXC card slot
Digital noise reduction	3D DNR	Max. SD card capacity	256 GB
Color sensitivity	Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light		
Infrared (IR)	No		
<b>Codificação</b>		<b>Inteligência de vídeo</b>	
Video streams	3	Alarm trigger	HDD error, HDD full, Invalid login, IP address conflict, Motion detection, Network disconnected, Video tampering
Main stream compression	H.264, H.264+, H.265, H.265+	Smart event	Advanced motion detection, Face capture, Intrusion detection, Line crossing detection, Motion detection, Region entrance detection, Region exiting detection, Scene change detection
Sub stream compression	H.264, H.265, MJPEG	Intelligence options	Person/vehicle detection on motion, line crossing, intrusion detection and entry/exit detection only (when VCA resource mode Smart Event is enabled)
Third stream compression	H.264, H.265		
Video bit rate	32 Kbps to 8 Mbps		
Main stream resolutions	1280 x 720 (XVGA), 1920 x 1080 (1080p), 2688 x 1520		
Sub stream resolutions	1280 x 720 (XVGA), 640 x 360 (nHD), 640 x 480 (VGA)		
Third stream resolutions	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 640 x 360 (nHD), 640 x 480 (VGA)		
Max. resolution @ fps	2688 x 1520 @ 25/30 fps		
<b>Lente</b>		<b>Elétrica</b>	
Lens type	Fixed	Operating voltage	12 VDC, 0.55 A, max. 6.6 W PoE (802.3af, 36 V to 57 V), 0.22 A to 0.13 A, max. 7.6 W
Focal length	2.8 mm, horizontal FoV 112°, vertical FoV 61°, diagonal FoV 134°	Power consumption	max. 7.6 W
f-stop	F1.0		
Auto iris	No		
<b>DORI</b>		<b>Físico</b>	
Detection	58 m	Physical dimensions	Ø138.3 x 125.2 mm Ø5.4 x 4.9 in.
Observation	23 m	Net weight	750 g 1.7 lb.
Recognition	11 m	Shipping weight	1055 g 2.3 lb.
Identification	2 m	Colour	Grey
		Material	Aluminium
		Form Factor	Turret
		<b>Ambiental</b>	
		Environment	Outdoor
		Operating temperature	-30 to +60°C -22 to +140°F
		Relative humidity	<95% noncondensing
		IP rating	IP67

# TVFC-M01-0401-TUR-G

TruVision 4MP Full color IP 2.8mm lens Turret Camera, 30m white light, mic

## Regulamentar

Compliance	CE, FCC, REACH, RoHS, UL, WEEE
------------	--------------------------------

## Compatible Accessories

TVD-CB3A	TruVision Dome 3-Inch Cup Base with rubber ring
TVD-CBW	TruVision Dome Cup Base Wall Mount (also cup base needed)
TVD-SNB	TruVision Dome Swan-Neck Bracket (also cup base needed)
TVD-PPB	TruVision Dome Pendant Mount Bracket (also cup base needed)
TVD-BB3	TruVision dome back box
TVD-BB3A	TruVision dome angled back box

## Lighting performance


White light	Yes
White light range	Up to 30 m

## Encoding

Third stream limitation	Supports only up to 10 fps
-------------------------	----------------------------

## General

Note regarding VCA resource mode	Third stream and Hallway View are not available in Smart Event and Face Capture mode. Standard Event mode supports these features but also disables the person/vehicle classification options for certain events.
----------------------------------	---

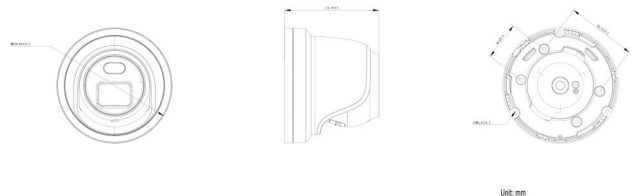

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 27 June 2023 - 15:10