



## Product Data Sheet

# FE130MM

Eco Line magnetic lock 300 kgf, monitored, mortise mount

### Description

---

Eco Line mag 300 kgf, monitored. Mortise mounting.

### Application

---

Medium Security applications for internal and external doors and transom housings.

### Reliable Security


---

This state of the art electro-magnetic locking device provides positive, instantaneous door control. Filler plates, angle brackets, and other mounting adapters are available to satisfy a wide range of door and frame types and conditions.

### Safe operation

---

Our locking devices are inherently fail-safe, releasing instantly upon command or loss of power. With no moving parts to wear, stick or bind; no mechanical linkages to bend or break; and no bolt travel time or misalignment to raise concern, both unlocking and locking are always accomplished with ease and efficiency. As those electromagnetic locking devices function independently of any mechanical type locks, magnetic locks will not jeopardize the fire door rating of an opening.

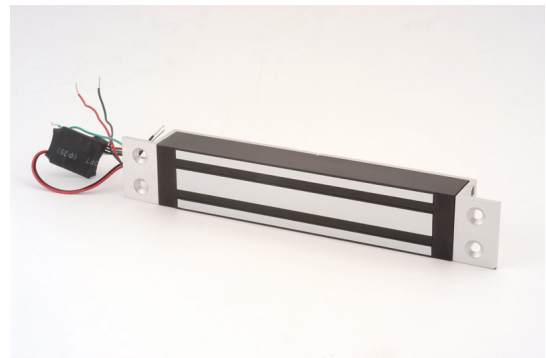

### Standard Features

---

- 300 kgf holding power
- Monitored changeover
- No residual magnetism
- 12/24 V dc jumper selectable operation
- Mounts easily with a minimum of tools

# FE130MM

Eco Line magnetic lock 300 kgf, monitored, mortise mount

## Specifications

Mount	Mortise
Holding force	300 kgf
Input voltage	12/24 VDC
Current draw	450 mA (+/- 2,5% @ 13,5 V)
Dimensions (W x H x D)	228 x 38 x 27 mm
Bi colour LED	No
Door status switch	No
Monitored changeover	Yes
Magnetic bond sensor	Yes

## Ordering Information

Part No.	Description
FE130MM	Eco Line magnetic lock 300 kgf, monitored, mortise mount

