



Product Data Sheet

IO956I

950 series sounder circuit controller, surface mount, with isolator

General

The IO956I is an addressable sounder controller. It is designed to control sounders powered by an external DC supply. Sounders are switched continuously or pulsed, and may be synchronised.

Interfaces for intelligent systems

The IO956I is designed to suit individual applications. This standard interface is designed to be surface mounted to walls and consist of three parts: a back box with knockouts for cable entry, a PCB assembly and a protective front cover.


Interface with isolator

The IO956I is fitted with a bi-directional short-circuit isolator so that they are unaffected by a single short-circuit on either loop input or output.

Sounder Control

The IO956I is normally used to control a zone of sounders powered by an external DC supply. The sounders will be switched to sound continuously or be pulsed, 1s on, 1s off.

An opto-coupled input is provided to monitor the state of the external power supply.

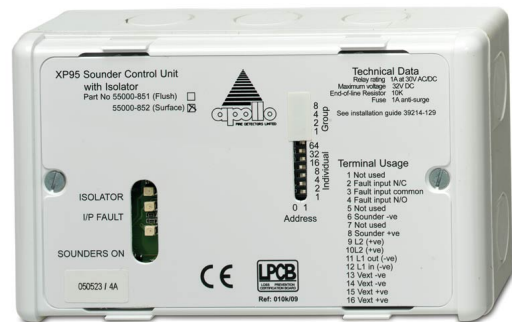

Standard Features

- LEDs for signalling of I/O and fault condition
- Aesthetically pleasing
- On board loop isolators
- Easy to install
- Well protected
- Modular design

IO956I

950 series sounder circuit controller, surface mount, with isolator

Specifications

Supply voltage	17 - 28 VDC
Current consumption (Loop current)	
Switch on surge (100 ms)	2.6 mA
Quiescent (with 10kOhm)	1.9 mA
Output active	1.7 mA
Fault	3.5 mA
Short circuit	4.5 mA
Current consumption (External supply)	
Relay off	1 mA @ 9 VDC or 3 mA @ 32 VDC
Sounders ON (excluding sounder load)	44 mA @ 9 VDC or 47 mA @ 32 VDC
Sounder Voltage (max)	50 VDC
Sounder Current (max)	1 A @ 30 VDC
Supervision	9 - 11 VDC
Operating temperature	-20°C to +70°C
Relative humidity (non condensing)	0-95%
Ingress protection	IP54

Ordering Information

Part No.	Description
IO956I	950 series sounder circuit controller, surface mount, with isolator

