



TVD-5408

TruVision IP Outdoor Dome Camera, 5 MPX, 2.8 to 12mm Motorized Lens,

Overview

The TruVision line of IP dome form factor cameras leverages the latest H.265 video compression technology to bring state-of-the-art, high-definition pictures to the mass video surveillance market. With camera resolutions of 2, 3, or 5 megapixel, these IP cameras represent a flexible video surveillance device to meet any need. Equipped with advanced technology and signal processing capability, they effectively capture video under challenging conditions.

TruVision cameras utilize H.264 and/or H.265 compression technology with triple-streaming capability, making it easy to manage the camera's bandwidth usage. Motorized varifocal lens technology allows the user to remotely adjust the varifocal lens length and focus the camera with the touch of a button. Select models feature Super Low Light technology, which provides a clear image in low lighting conditions with a minimum of "grainy" interference. Recording to a local MicroSD card (not included) protects data in the event of network disruptions.

These cameras go above and beyond standard motion detection with enhanced alarm capabilities, including cross lines, intrusion, de-focus and face detection features. Each is user-configurable to best suit the installation environment. A Region of Interest function ensures specific portions of an image are given priority during instances of high network traffic or network degradation.

Location-specific functions include a Hallway View Mode to provide a portrait view of a hallway or corridor, a De-Fog Mode to help resolve images through fog or rain and Electronic Image Stabilization for installations subject to physical vibration or shaking.



Standard Features

- Maximum Resolution: 2592 × 1944
- Maximum Real Time Resolution: 2592 × 1944 @ 25 fps
- Designed to PSIA and ONVIF Profile G and S open standards
- H.265 and/or H.264 compression with triple-streaming functionality
- Edge recording up to 128GB SDHC card
- 1/1.8" CMOS image sensor
- Motorized IR Cut Filter
- Color: 0.01 Lux @f1.2 (AGC On), 0 Lux IR On
- Motorized Lens 2.8 to 12mm
- Up to 30m IR illumination
- Digital Wide Dynamic Range
- Intelligence (Face detection, Audio Exception Detection, Intrusion Detection, De-focus Detection, Region of Interest (ROI), Electronic Image Stabilization (EIS), Defog, Scene Change Detection, Cross Line Detection, Advanced Motion Detection, Region Entrance Detection, Region Exit Detection, Object Removal, Object Left Behind, Object Counting)

TVD-5408

TruVision IP Outdoor Dome Camera, 5 MPX, 2.8 to 12mm Motorized Lens,

Specifications

Camera

Sensor:	5 MPX 1/1.8" Progressive Scan CMOS
Day/Night:	Motorized IR Cut Filter
IP Compression/Standard:	H.265/ H.264 / MJPEG
Maximum Resolution (@ FPS):	2592 × 1944 @ 25 fps
Maximum Real Time Resolution (@ FPS):	50Hz: 25fps(2592 × 1944, 2560X1920, 2048 × 1536) 50fps(1920 × 1080, 1280 × 960, 1280 × 720)60Hz: 30fps (2592 × 1944, 2560X1920, 2048 × 1536), 60fps(1920 × 1080, 1280 × 960, 1280 × 720)"
Multiple Streaming:	Triple Streams
Video Bit Rate:	128 Kbps to 16 Mbps, adjustable
S/N Ratio:	52 dB (AGC OFF)
Auto Exposure (shutter):	50 Hz: 1/3s to 1/100,000s 60 Hz: 1/3s to 1/100,000s
Composite Output (BNC):	PAL, 1.0 Vp-p @ 75 ohm

Lighting performance

Wide Dynamic Range	DWDR
WDR in dB	N/A
Digital noise reduction	3D DNR
Highlight compensation (HLC)	No
Day/Night	True D/N
Motorized IR Cut Filter	Yes
Color sensitivity	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux IR ON
IR Range	Up to 30 m
IR Wavelength	850nm

Lens

Control type:	DC
Focal length:	2.8 to 12mm
Zoom lens:	Motorized
Autofocus:	Yes

Electrical

Voltage Input:	12VDC / 24VAC / PoE (802.3af / 802.3at with heater)
Power Consumption:	17 W
Current:	1420mA @ 12VDC / 1010mA @ 24VAC
Auxiliary Power	50mA @12VDC Line level

Network

Network Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, ezDDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos, IPv6. ONVIF, PSIA, CGI
PoE IEEE:	802.3at
Standard & Integration	ONVIF Profile (G,S), PSIA, CGI

LocalStorage

Media:	MicroSD/micro SDHC/ microSDXC
Capacity:	Up to 128GB
Input:	Audio in / Mic in (line level)
Output:	Audio out
Audio bit rate (protocol)	G.711ulaw, G.711alaw, MP2L2, G.726, PCM

Camera Alarm

Basic:	Motion Detection, Tamper Proof, Privacy Mask
Advanced:	Face detection, Audio Exception Detection, Intrusion Detection, De-focus Detection, Region of Interest (ROI), Electronic Image Stabilization (EIS), Defog, Scene Change Detection
	Cross Line Detection, Advanced Motion Detection, Region Entrance Detection, Region Exit Detection, Object Removal, Object Left Behind, Object Counting
Input/Output:	1 input / 1 output

Display

Display mode:	N/A
OSD:	N/A


Mechanical/ Environmental

Camera type:	Dome
Dimensions:	Ø 159.8 × 146 mm (6.29 × 5.75 in.)

Weight:	2100 g (4.62 lbs.)
Storage Temperature:	-30° to 60°C (-22° to 140°F)
Operating Temperature:	-40 to +60°C (-40 to +140°F), with heater on
Environmental Rating:	IP66
Vandal Rating:	IK10
Outdoor:	Yes
Regulation	
Compliance:	FCC, CE, UL, WEEE, RoHS, REACH
Accessories	
Brackets:	TBD

Ordering Information

Part No.	Description
TVD-5408	TruVision IP Outdoor Dome Camera, 5 MPX, 2.8 to 12mm Motorized Lens, DWDR, 30m IR

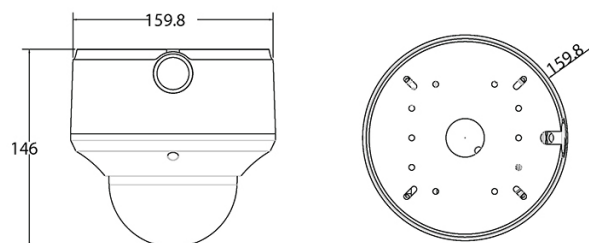

Unit: mm

